

General characteristics

- VISION TOUCH – Control touch panel
- Large door handle with two positions for comfort, ease of use and safety
- Curved door glass with cool down function
- Hygienic cooking chamber with rounded inside corners
- Even baking thanks to the bi-directional fan
- Perfect illumination of the cooking chamber by means of halogen lights
- Double glass door that limits the escape of heat
- Run-off tray under the door for collecting condensed water
- Removable door seal
- WSS - water saving system prevents high water consumption in all cooking modes
- Two position door catch (safety position)
- Integrated shower for easy cleaning which does not use softened water
- SDS - service and diagnostic system- automatic evaluation of microprocessor error reports
- IPX5 protection
- Wall installation possibility

Model: GVCC623



Independently ranked most energy efficient worldwide

Model characteristics

- **EASY COOKING** – One touch cooking
- **VISION TOUCH** – Touch control panel
- **VISION AGENT** – On board instruction manual
- **ACTIVE CLEANING** – Automatic cleaning system
- Multi point core temperature probe
- Overnight roasting / cooking
- Delta T roasting / cooking
- Cook & Hold
- Regeneration
- Banquet system
- Separate rack timing
- Programming up to 1000 programs
- Bi-directional 5 speed fan
- Fan Stop – immediate stop of ventilator when doors opened
- Automatic preheating / cooling
- Autoclima – steam saturation control
- ACM (Automatic Capacity Management)
- SDS (Service and Diagnostic System)
- WSS (Water Saving System)
- Curved glass door
- Double glass doors preventing heat escape
- Turbo steam function – fast steam
- LAN – internet communication channel
- Integrated shower
- Removable door seal
- USB Plug-in
- Flap valve


Optional

- Safety door opening in two steps
- Optional voltage 3N~/230V/50Hz

Marine specification

- 3N~/400V/50-60Hz without N
- 3N~/440V/50-60Hz without N

Model: **GVCC623**

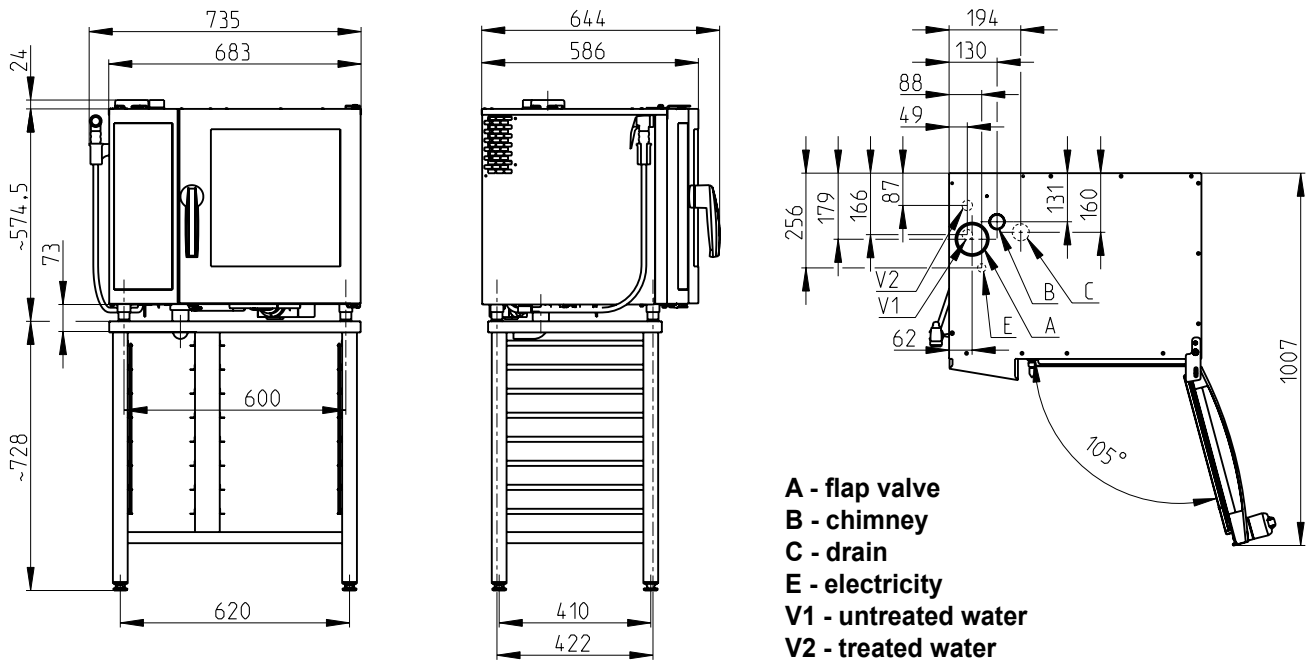

TECHNICAL DATA

Energy	electricity
Steam generation	injection
Capacity	6 trays GN2/3
Capacity of meals	30 - 50
Spacing [mm]	65
Dimensions (W x H x D) [mm]	683 x 575 x 644
Weight	65 kg
Total power	4,9 kW (3,3 kW*)
Fuse protection	10 A (16 A*)
Voltage	3 N~/400 V/50 Hz or 3 phase + neutral
Water connection / drain [mm]	G 3/4" / 40
Temperature	30 - 300 °C

Goldstein Eswood continually works on improving our products, so dimensions may change without notice. For any construction critical dimensions please check with us.

GOLDSTEIN ESWOOD
211 - 217 Woodpark Rd SMITHFIELD NSW 2164
T: 1800 013 123 F: 02 96045420
E: sales@goldsteineswood.com.au

goldsteineswood.com.au



serving those who serve the best for

100 YEARS
1911 - 2011